

Leviathan Mk2 Quick Start Guide


Please find detailed here some initial setup instructions that must be followed before using the system for recording.


The two main system screens are shown below,







This is the system screen,


This is the Video Server screen,



By pressing the Video Server button  on the system screen the Video Server screen will be displayed.



By pressing the minimize button  on the Video Server screen the system screen will be displayed, please note that the Video Server is still running minimized and will continue to record in the background.





You will need to tell the system which camera inputs have cameras connected to them, to do this enter the configuration menu by pressing the tool button , now click the camera setup button  to display the camera options.


If there is a camera connected to the input click the connected button  so that it turns green , this means the input is now enabled, for inputs that have no camera connected please disable these otherwise they will show a camera fault.

To setup each camera use the camera select slider  to select the settings for each individual camera input.

After you have setup your cameras you need to commit the settings by pressing the save button , if you are not happy with your settings and don't wish to commit them press the cancel button .





To make sure your system is recording you need to press the record button , it is set to record when it is highlighted green .

You may also wish to familiarize yourself with the system screen buttons, The Video Server button  will display the Video Server screen, the run programs button  is used to start either CD Burning (see overleaf) or the C64 Printer setup, the shutdown button  is used to either shutdown or restart the DVR, and the login/logout button  is used to login to the advanced user mode which unlocks additional setup options and logs.

To login to advanced mode you need to press the login button , you will be prompted to enter a user name and password


Master User name: admin


Master Password: vshell



Advanced mode unlocks the following additional buttons, if you select the log file button  the Video Server logs are displayed showing system start ups shutdowns and other information, the Video Client button  launches the Video Client software, the system configuration button  allows you to change various settings such as IP address power options display options, and the system maintenance button  gives options to wipe the video data base and ping a network server/client.


Leviathan Mk2 CD Burning Guide


Steps for backing up video onto blank CDR disc :-

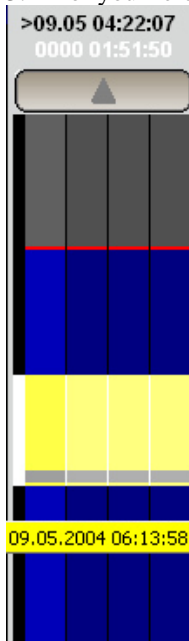1. In the Video Server software click the video explorer button  to enter explorer mode.
2. Select the date you require on the calendar then by pressing the left mouse button and dragging downwards on the explorer timeline to create a range of video.
3. For your reference you will now see your range expanded to fill the whole of the explorer timeline.



4. Press the save video fragment button , a dialog box will be displayed  showing the size of the video fragment to be saved, make sure it does not exceed 650MB as this is roughly the capacity of a CDR disc, click OK.

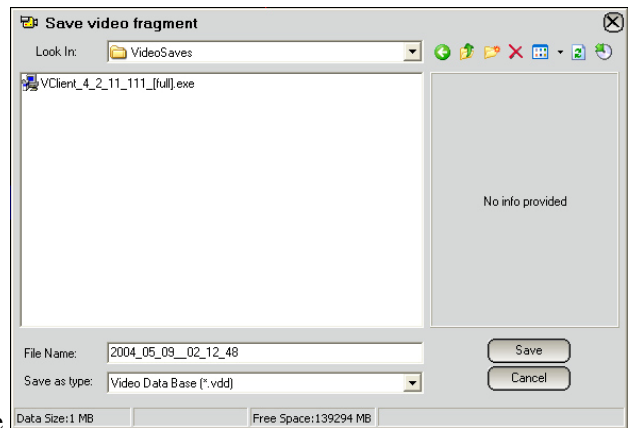

5. Another window will appear asking for a file name  give the file a meaningful name and press the Burn to CD button.
6. A CD Burning wizard will now appear, follow the on screen wizard that will proceed to burn the video fragment to the CD as well as the LJD Client software installer.