



G3 Lite Speed Dome Quick Start Guide- Resuming after user intervention

This guide explains the procedure for setting a G3 Lite Speed Dome to resume into a tour, scan, pattern or preset after user intervention.

Step 1.

Call 'Preset 95' from the cameras keyboard. You will be presented with the main menu within the on screen display (OSD). (Fig. 1)

Step 2.

Using the controllers joystick, move the cursor to 'System Setting' and move the joystick right to select. (Fig. 1)

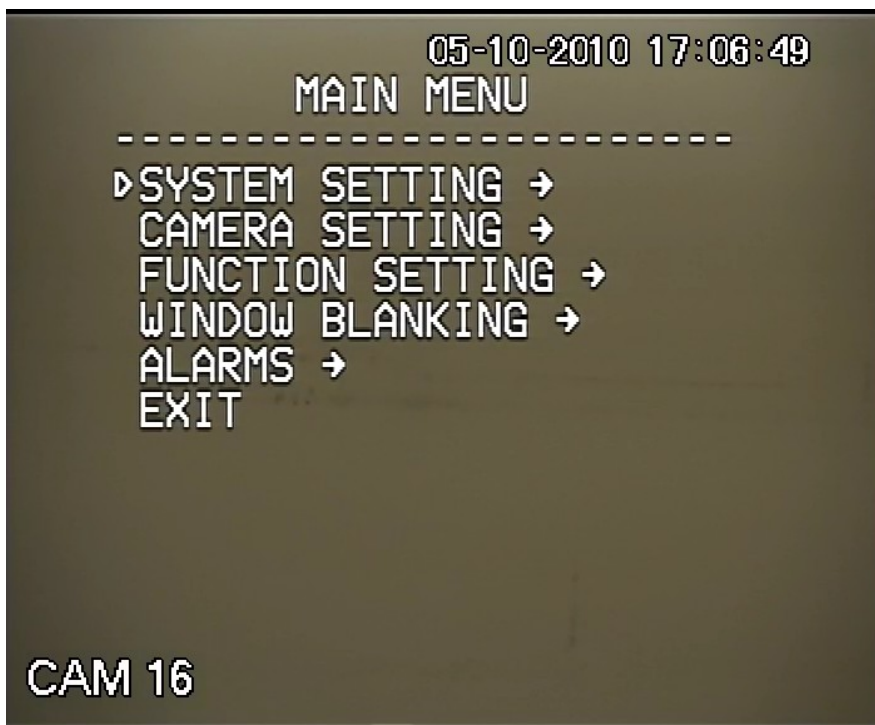


Fig. 1

Step 3.

Move the cursor to the 'Motion' option and move the cursor to the right to select. (Fig.2)

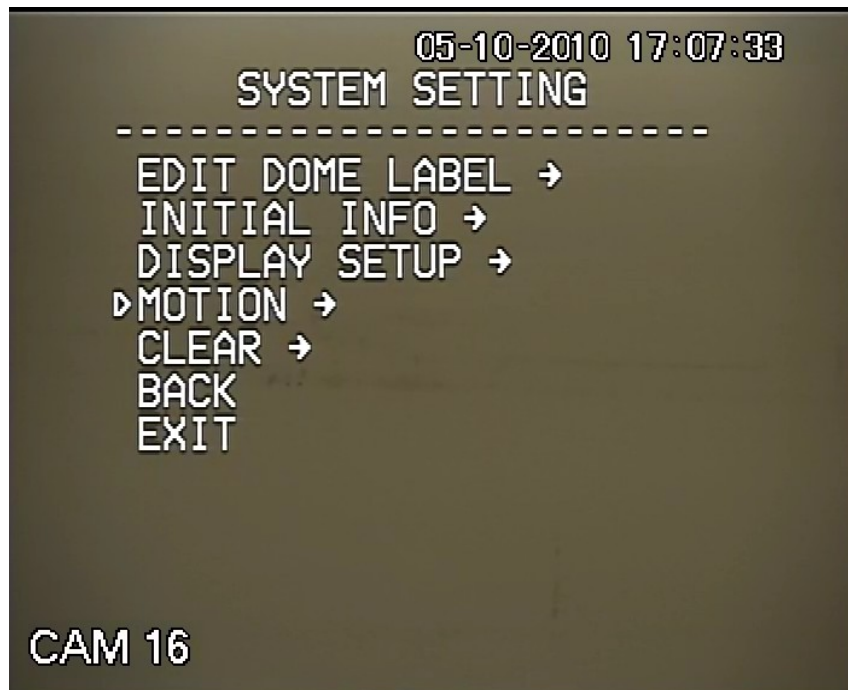


Fig. 2

Step 4.

Move the cursor to the 'Park Time' position and move the cursor to the right. We can now set the park time by moving the controller up or down. This is adjustable in minutes and ranges from 1 minute to 240 minutes. E.g. Fig.3 below shows 10 minutes. Move the cursor right to confirm.

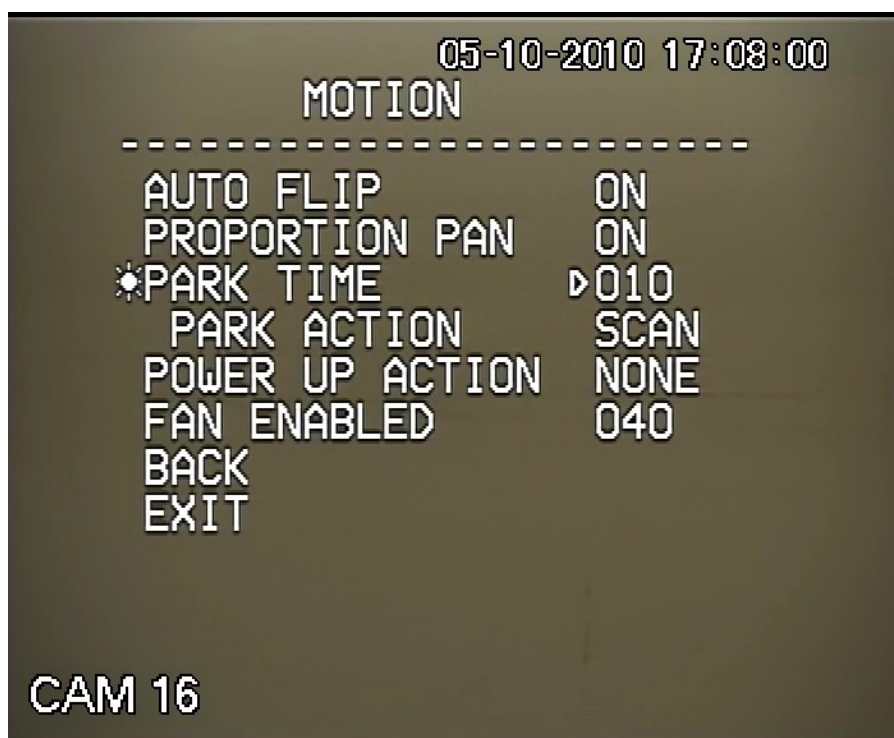


Fig. 3

Step 5.

Now we need to define the 'Park Action'. This is the function that will be actioned after the desired 'Park Time'. Firstly move the cursor to the '*Park Action*' position (Fig. 4) and move the cursor to the right to select. The 'Park Action' can now be defined. The example below tells us that after 10 minutes of the dome being idle, 'Pattern 1 (PAT1)' will commence.

Available options are as follows;

SCAN = Scan 1

PRESET = Preset 1

PAT1/2/3/4 = Pattern 1/Pattern 2/Pattern 3/Pattern 4

TOUR = Tour 1

NONE = No Action.

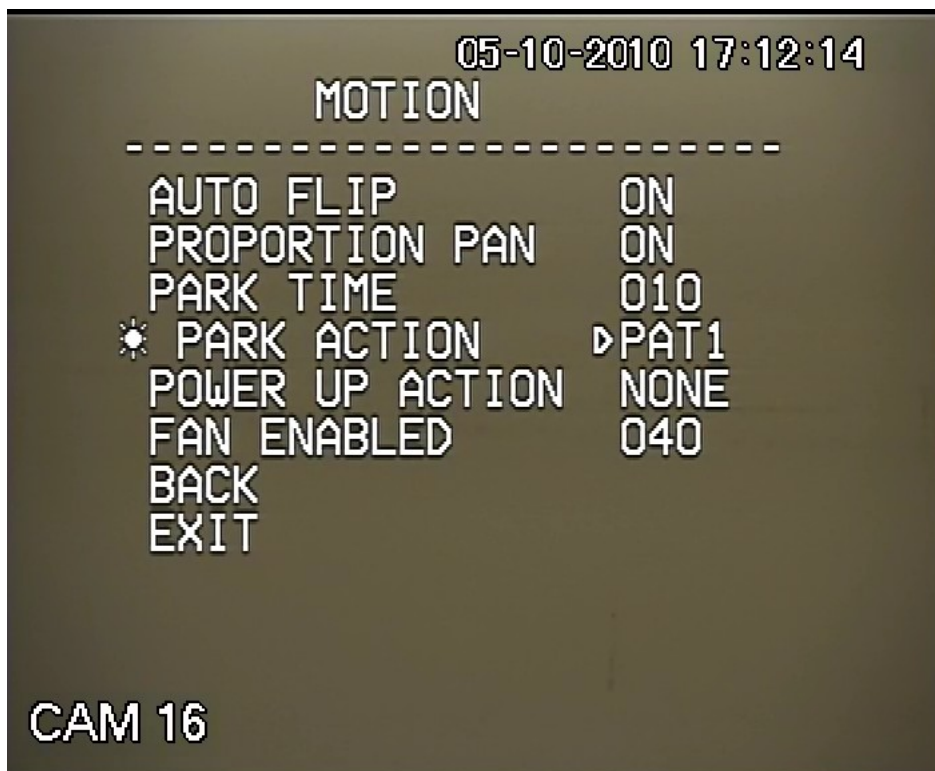


Fig. 4

Step 6.

Finally, move the cursor to the 'Exit' position to finish.

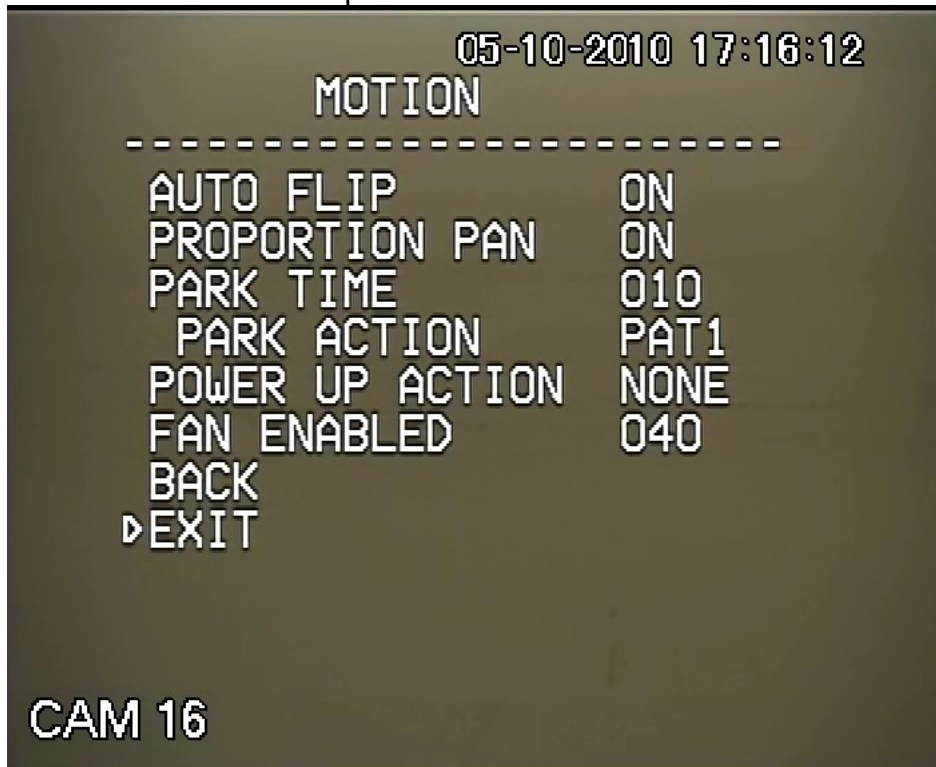


Fig. 5