


Apollo and Zeus DVR Network Setup Guide

Please follow the steps below to assist you in setting your Apollo or Zeus DVR on a local area network (LAN). Please note – some of the screen shots and instructions are based on Windows Vista and Windows 7. If your PC is Windows XP please download the alternative XP guide from our website.


The following instructions guide you on obtaining the current network settings of a PC already on the LAN. Once this information is obtained, this information can then be used to enter the correct information into the Apollo or Zeus DVR.




1. Click the Start Icon in the bottom left corner of the screen.
2. In the search box at the bottom of the start menu, type *CMD* and press Enter.

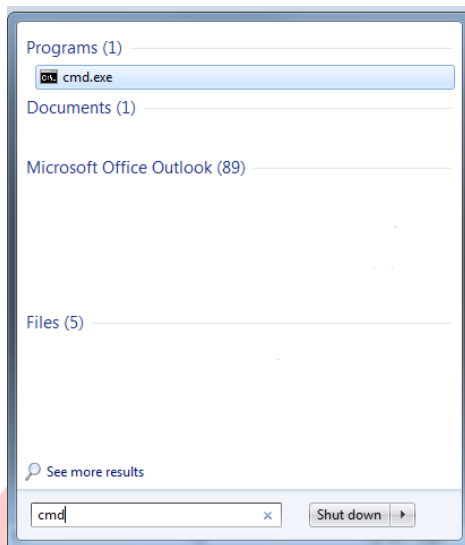

3. On completing step 2. You will be provided with the following screen. Type *ipconfig* as shown below and press enter.

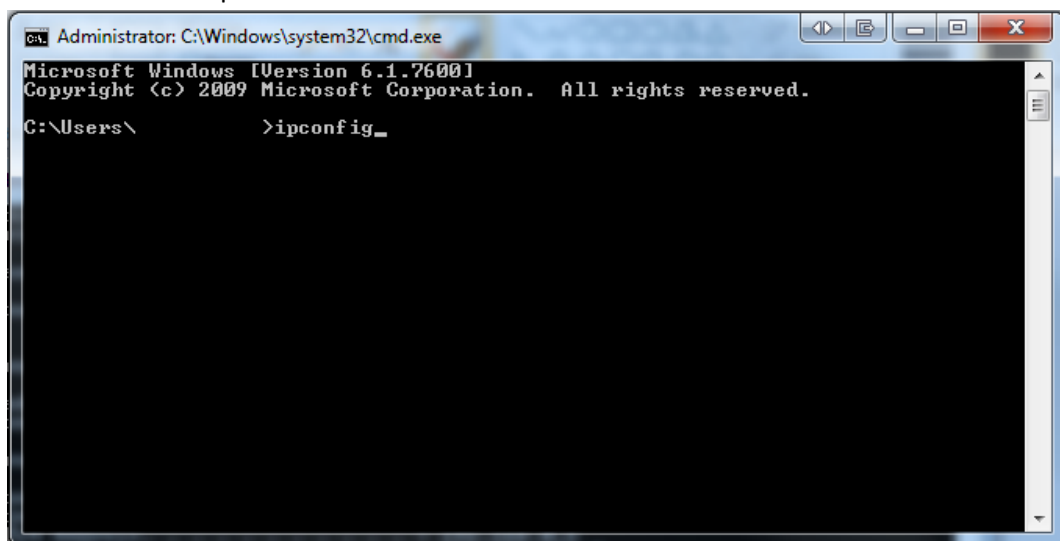

4. The following screen shows what information will be shown after pressing enter.

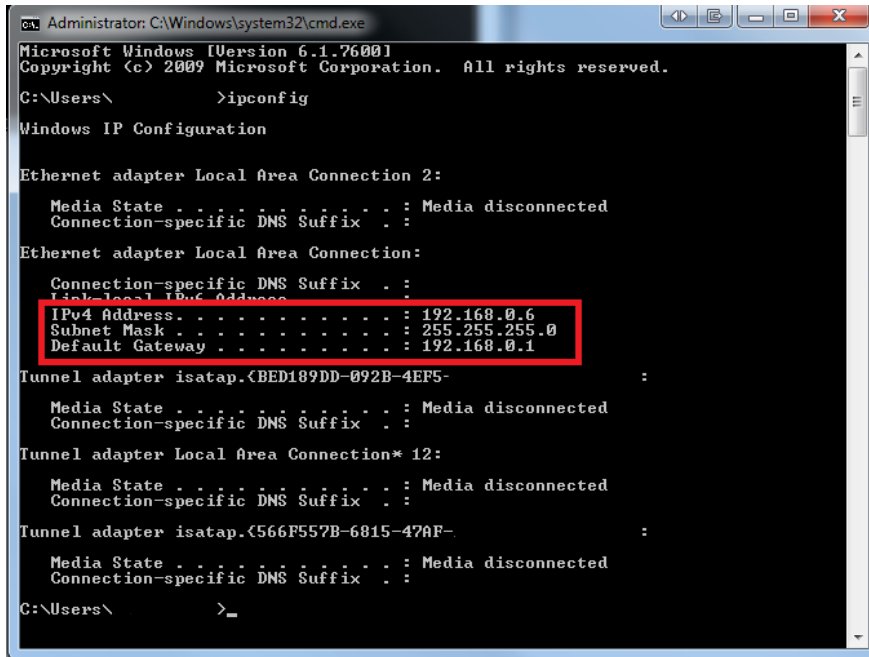

```
Administrator: C:\Windows\system32\cmd.exe
Microsoft Windows [Version 6.1.7600]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\ >ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection 2:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . :
    Link-local IPv6 Address . . . . . :
    IPv4 Address. . . . . : 192.168.0.6
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.1

Tunnel adapter isatap.{BED189DD-092B-4EF5-
    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Tunnel adapter Local Area Connection* 12:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Tunnel adapter isatap.{566F557B-6815-470F-
    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

C:\Users\ >
```

The information shown in the red box above tells us information about the **computer only**.

5. Make note of the **IP address** (IPv4 Address), the **Subnet Mask** and the **Default Gateway**.
6. The rest is easy. Simply call up the Network settings page on the Apollo/Zeus DVR. Copy **only** the **Default Gateway** and **Subnet Mask** into the corresponding boxes on the DVR.
7. On the DVR enter an IP address that is unique to anything else on your LAN. We can see above that a device on this LAN (i.e. the PC) has the address 192.168.0.6, so this **cannot** be used by the Apollo or Zeus. An example would be to use the IP address 192.168.0.185. It's essential that the 1st three set of digits of the IP address i.e. 192.168.0 are the same 1st three digits of the **Default Gateway**.
8. Don't forget to click Save!

Steps 6 & 7 are shown in a video tutorial at <http://www.adata.co.uk/support/ApolloNetTutorial.htm>